




Yearly Drilling Plan (YDP)


A Strategic Roadmap for **Capital Allocation**,
Execution, and **Asset Optimization**

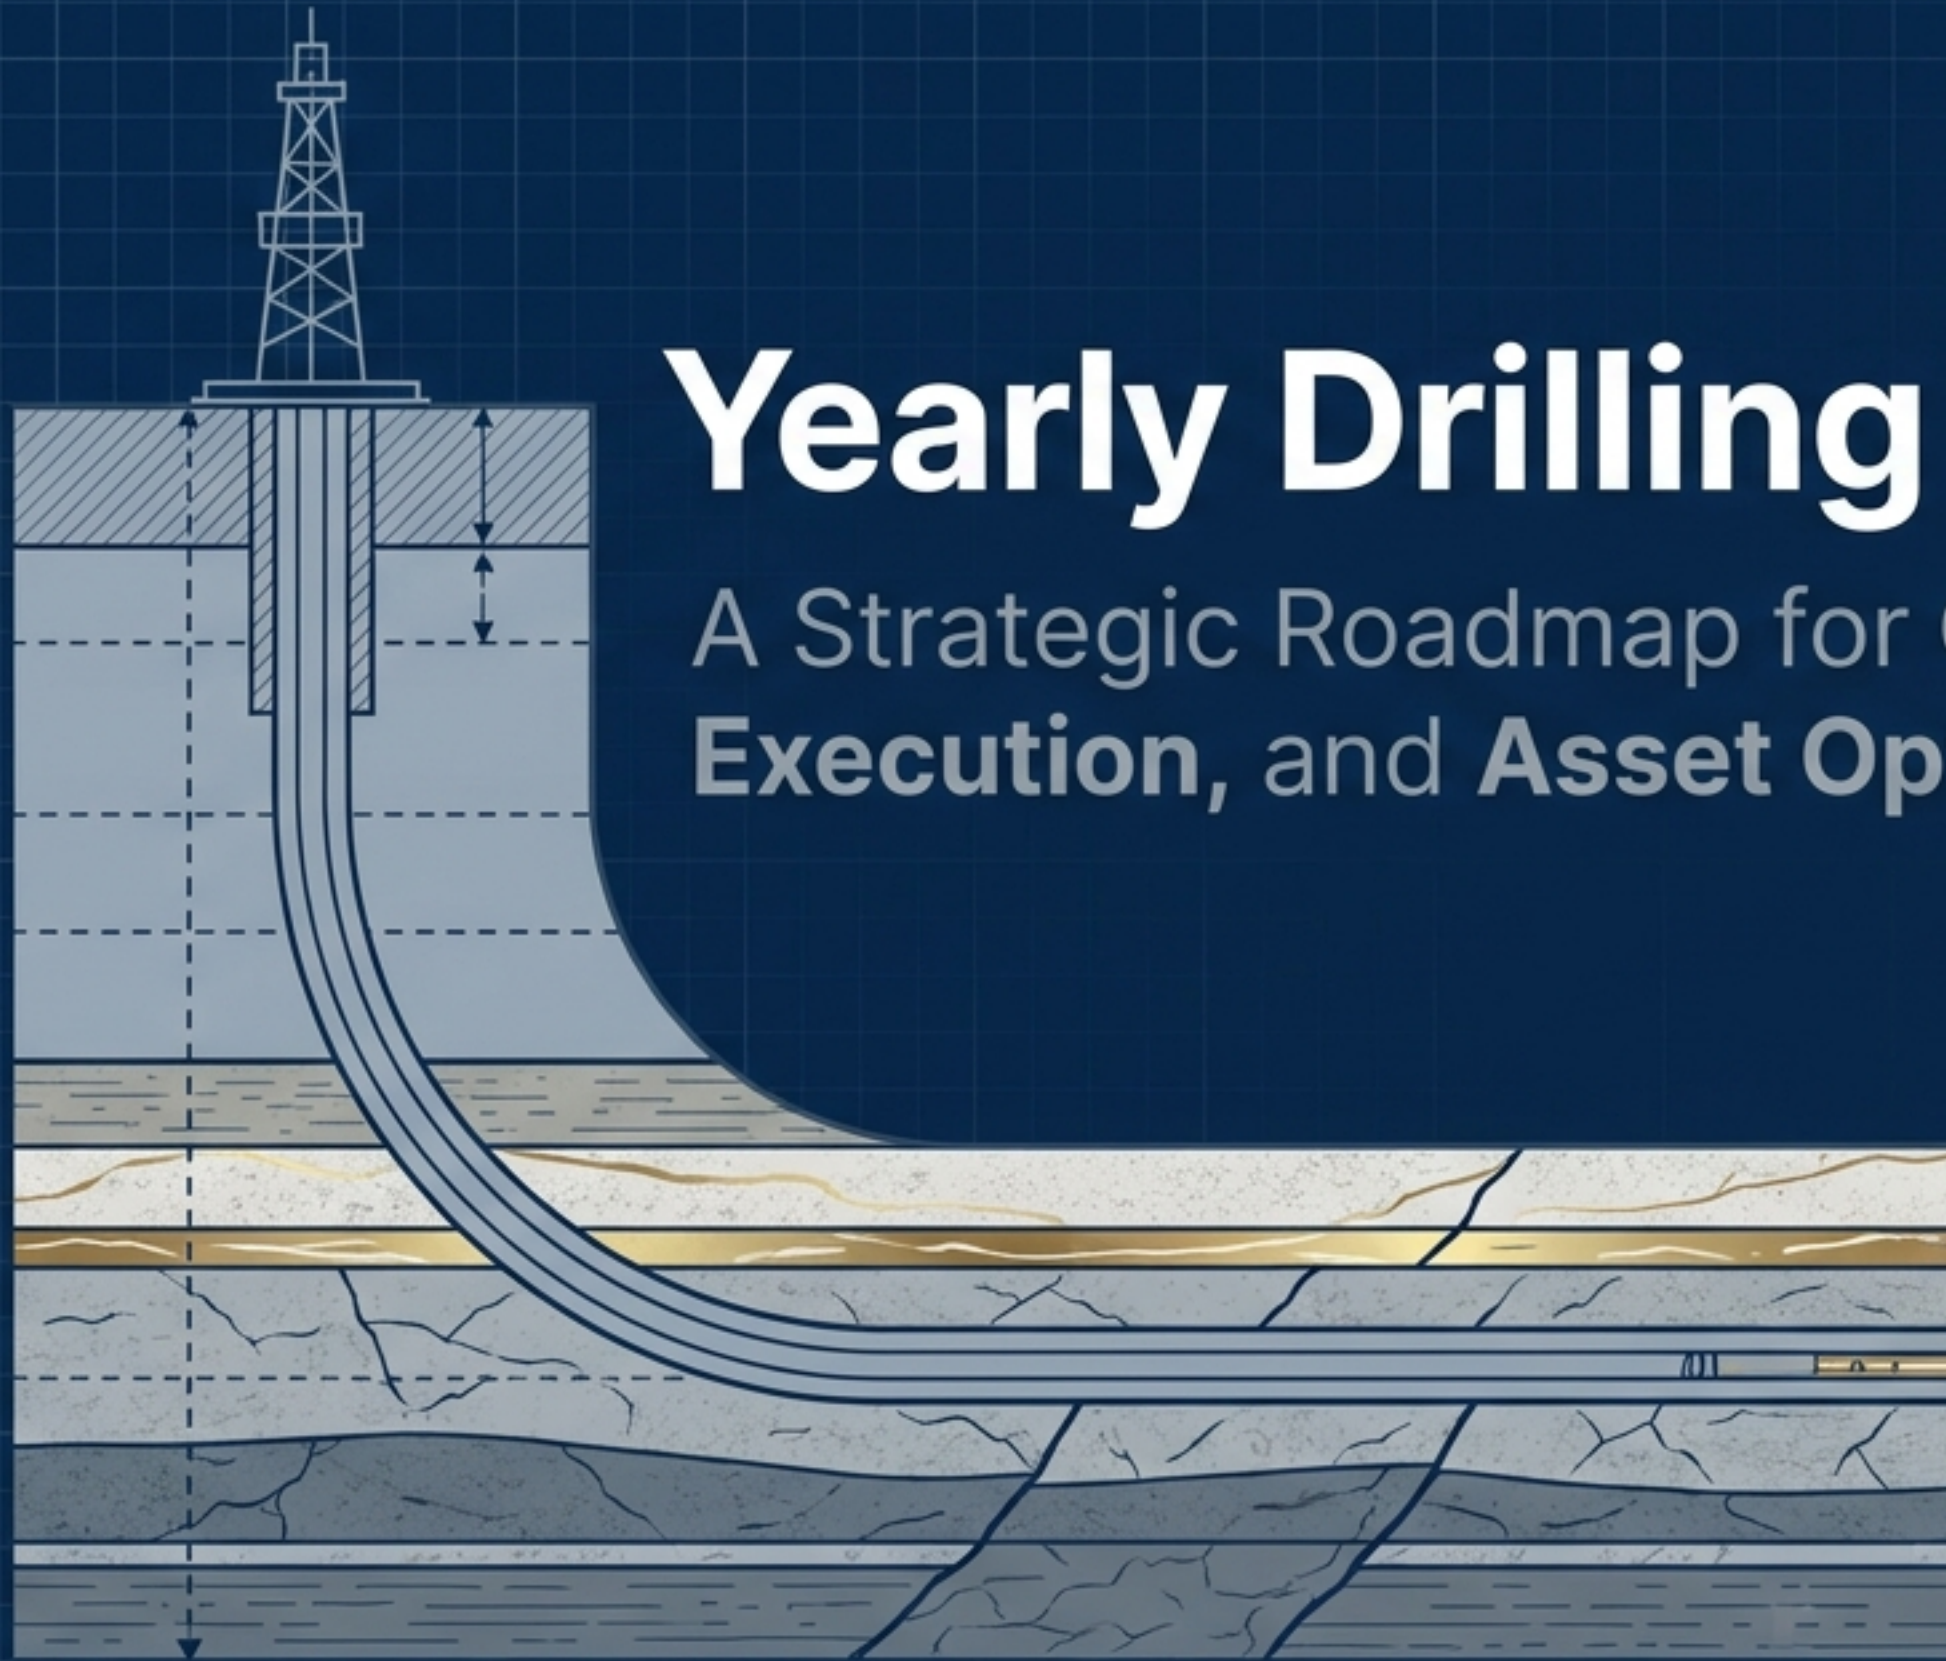

Prepared by Engineer Sajjad K.Hano

Balancing the E&P Equation

The Yearly Drilling Plan bridges the critical gap between raw subsurface potential and flawless surface execution, acting as our operational and financial roadmap.

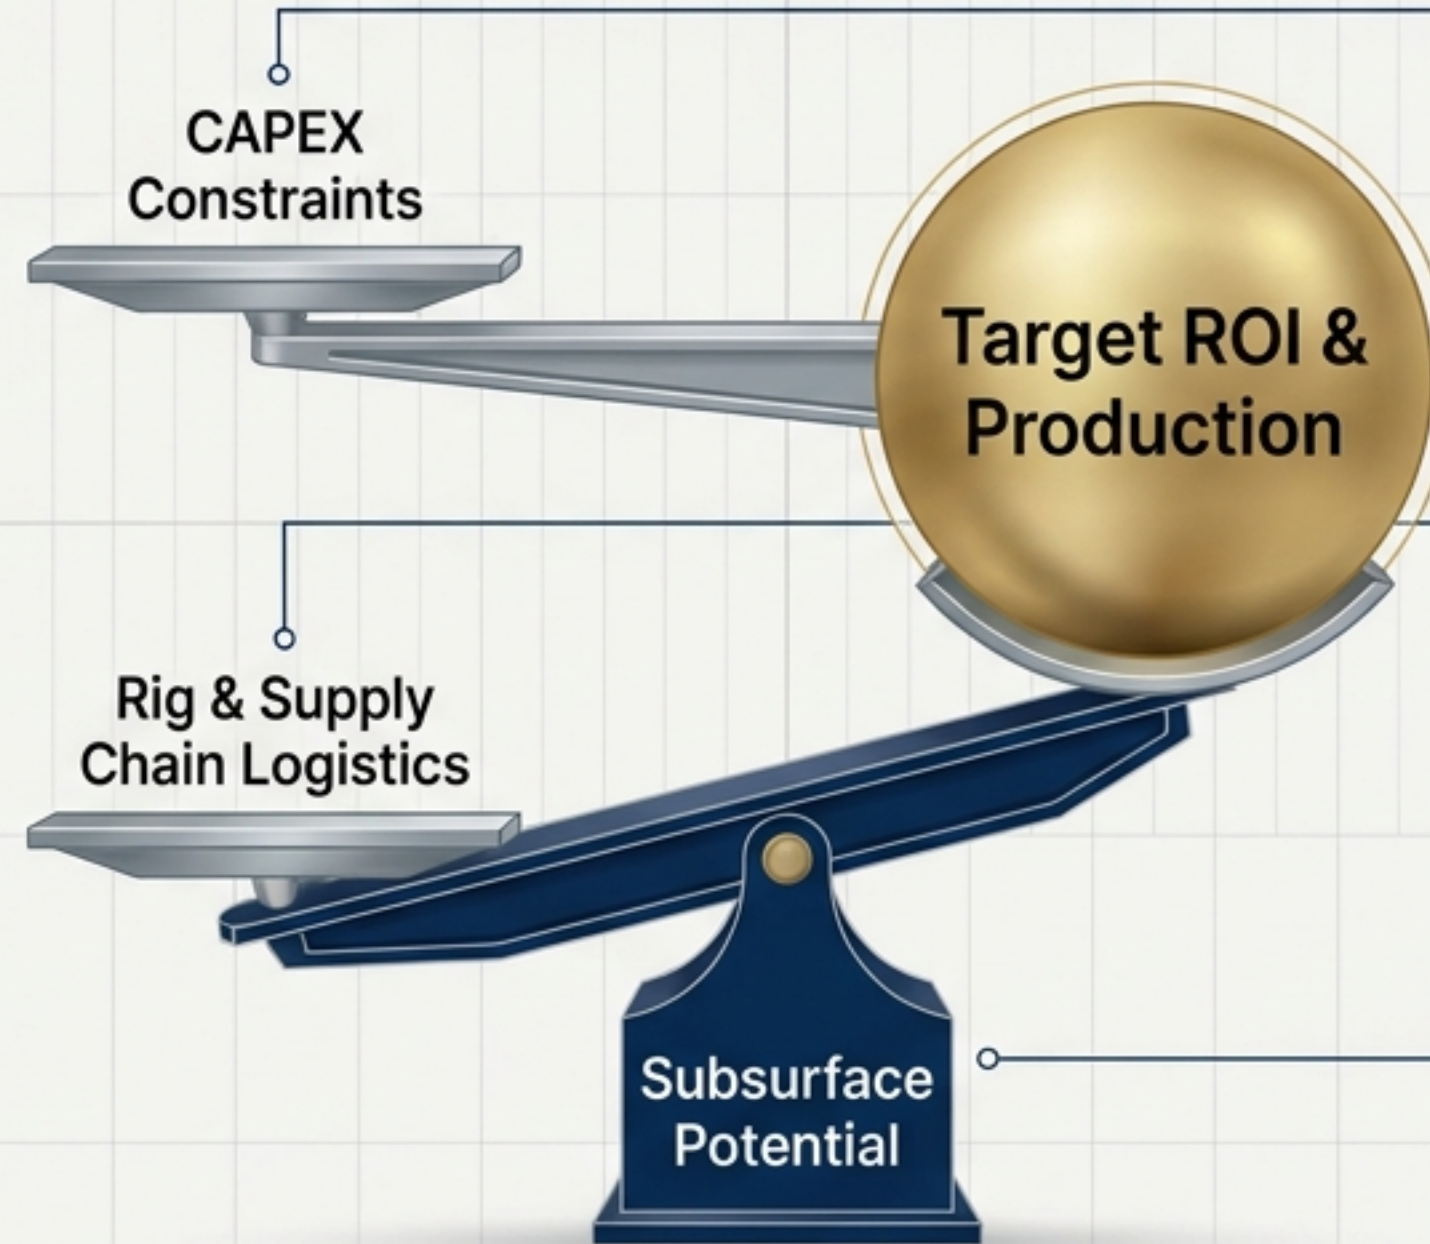

Align Targets:

Meet corporate production goals while proactively managing reservoir depletion.

Optimize Capital:


Maximize capital efficiency without compromising aggressive drilling schedules.

Maximize Returns:


Maintain an uncompromising focus on maximizing Net Present Value (NPV) and Return on Investment (ROI).

Transforming Raw Assets into Flowing Wellbores

Executing a successful YDP requires intense, multidisciplinary collaboration across two distinct operational halves.

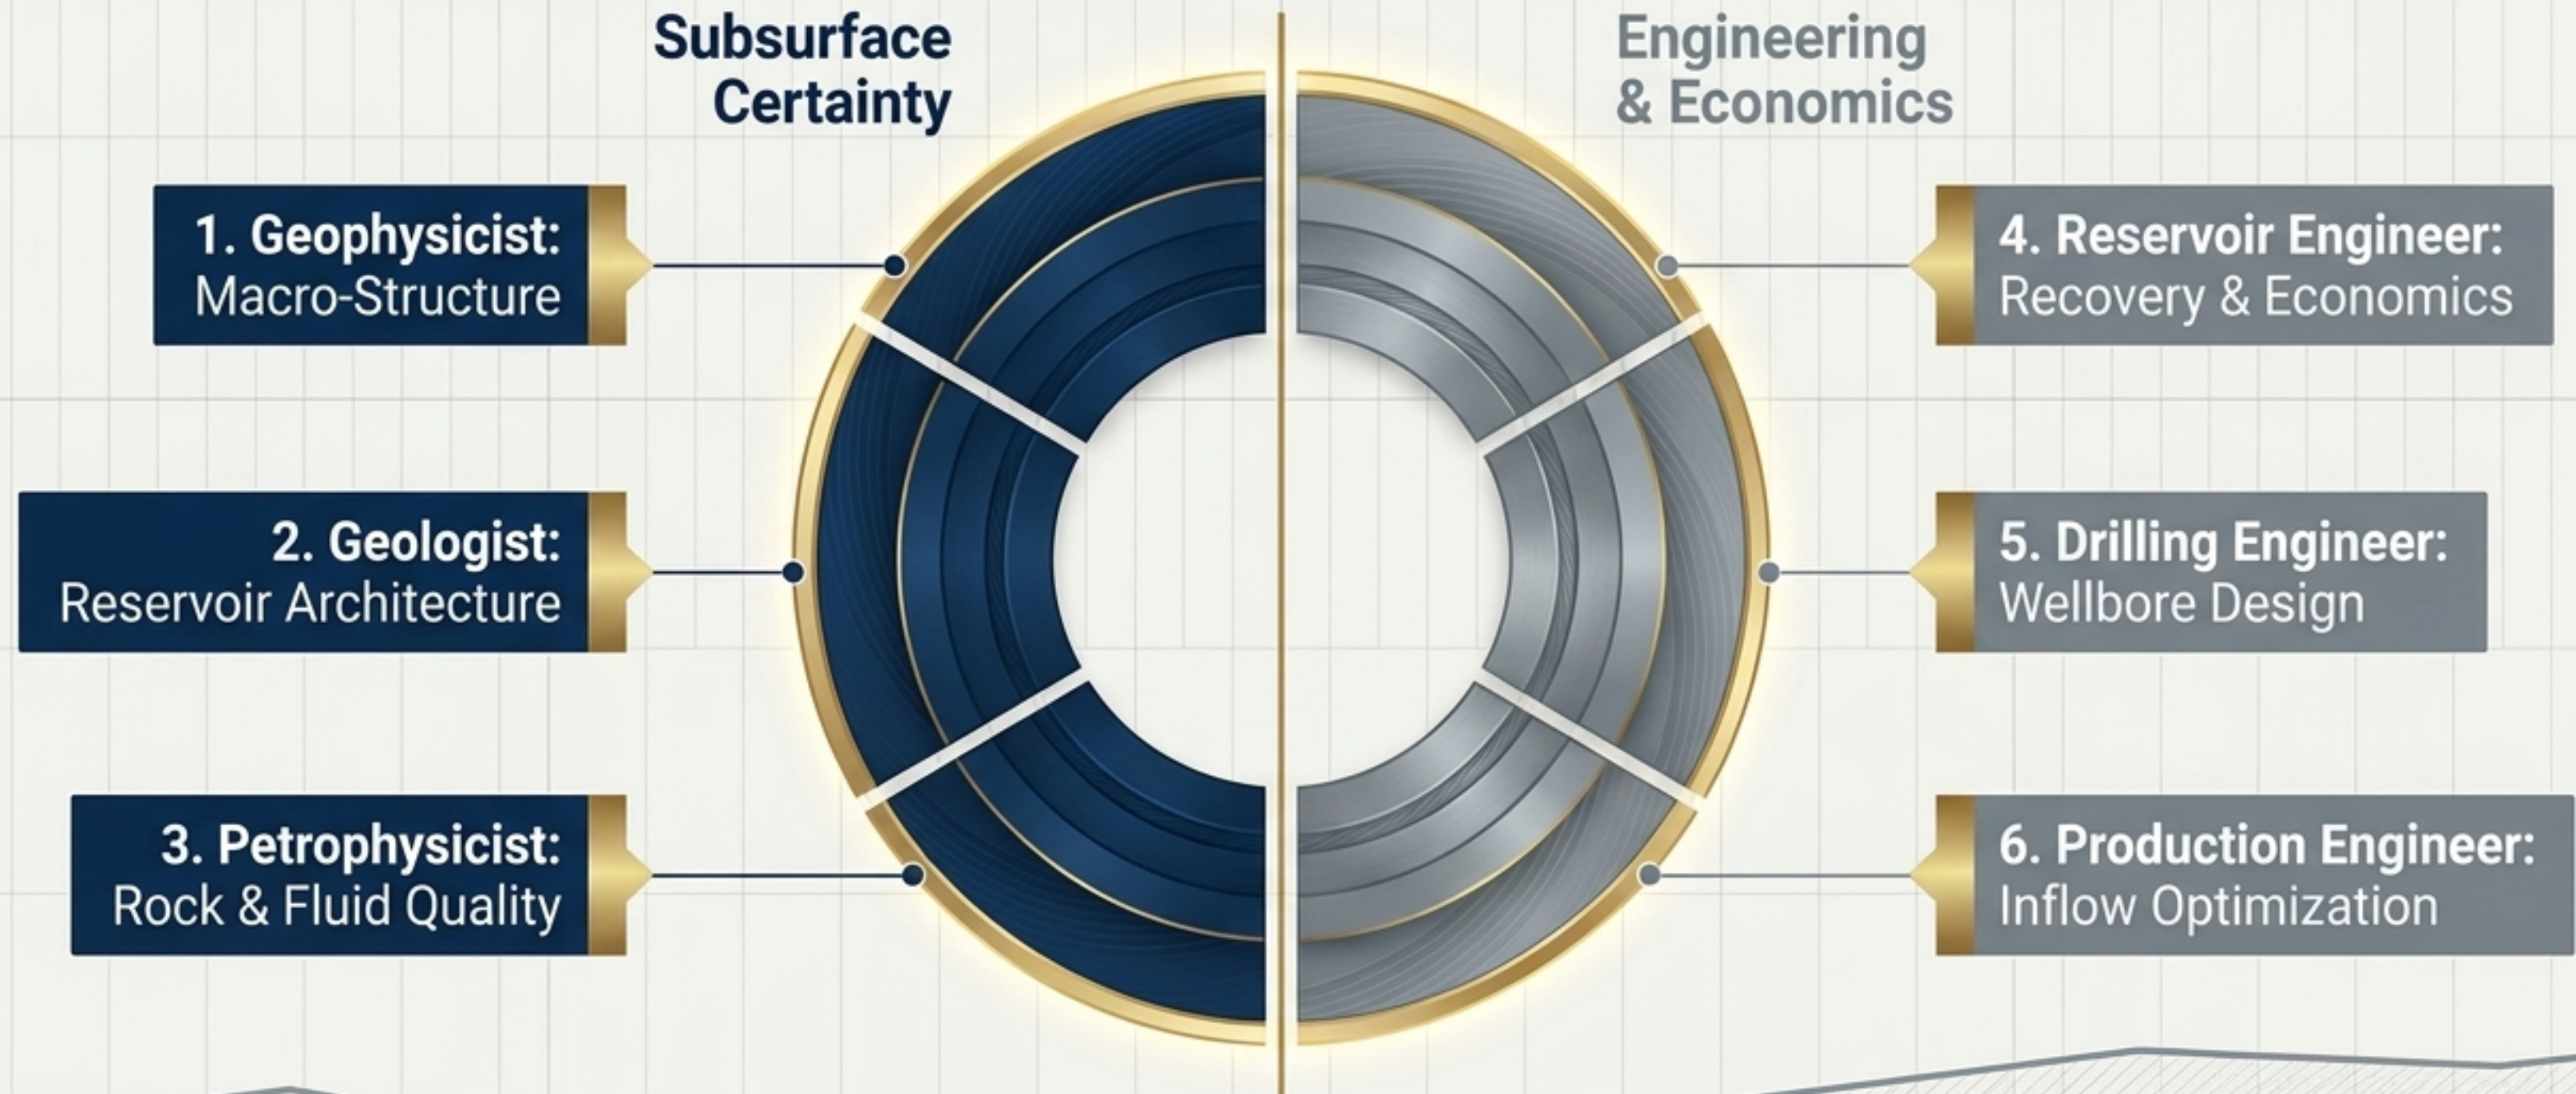


Defining the Target and Mitigating Subsurface Risk

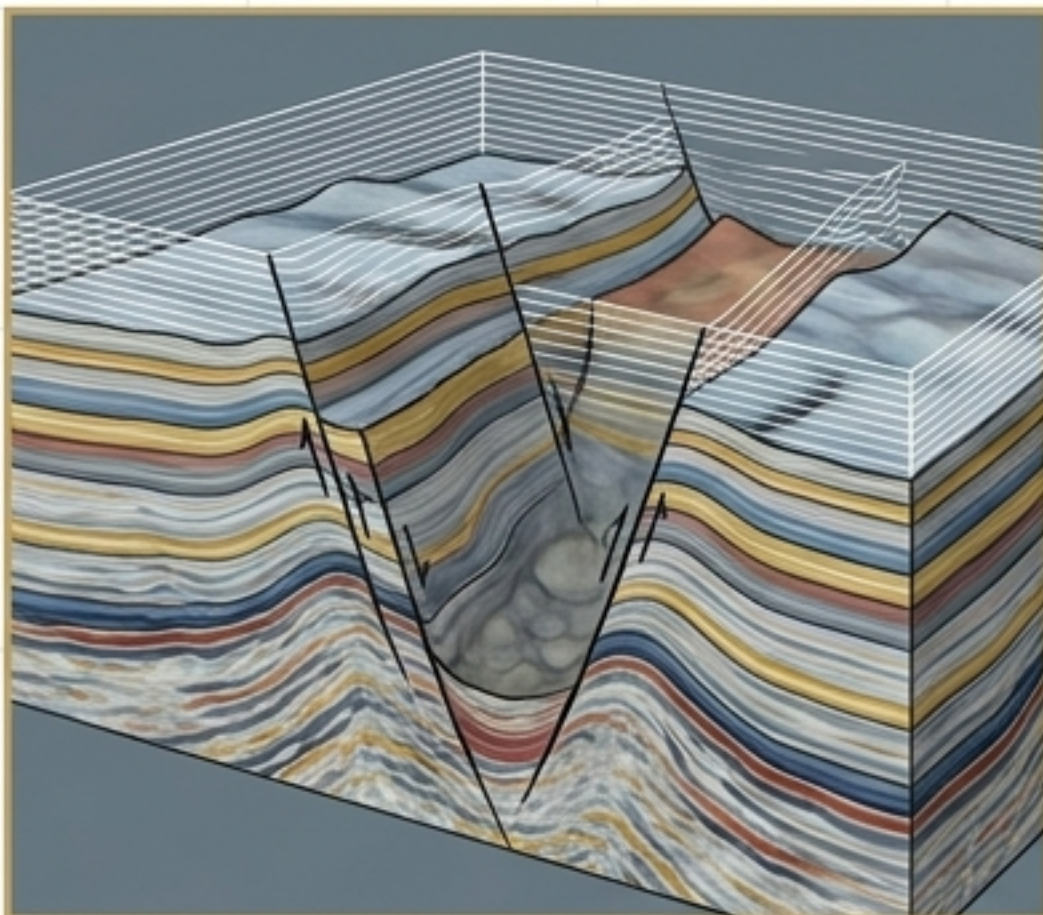


Geophysicist

Processes 3D/4D seismic data to identify structural traps, fault blocks, and critical drilling hazards (e.g., shallow gas, overpressure).

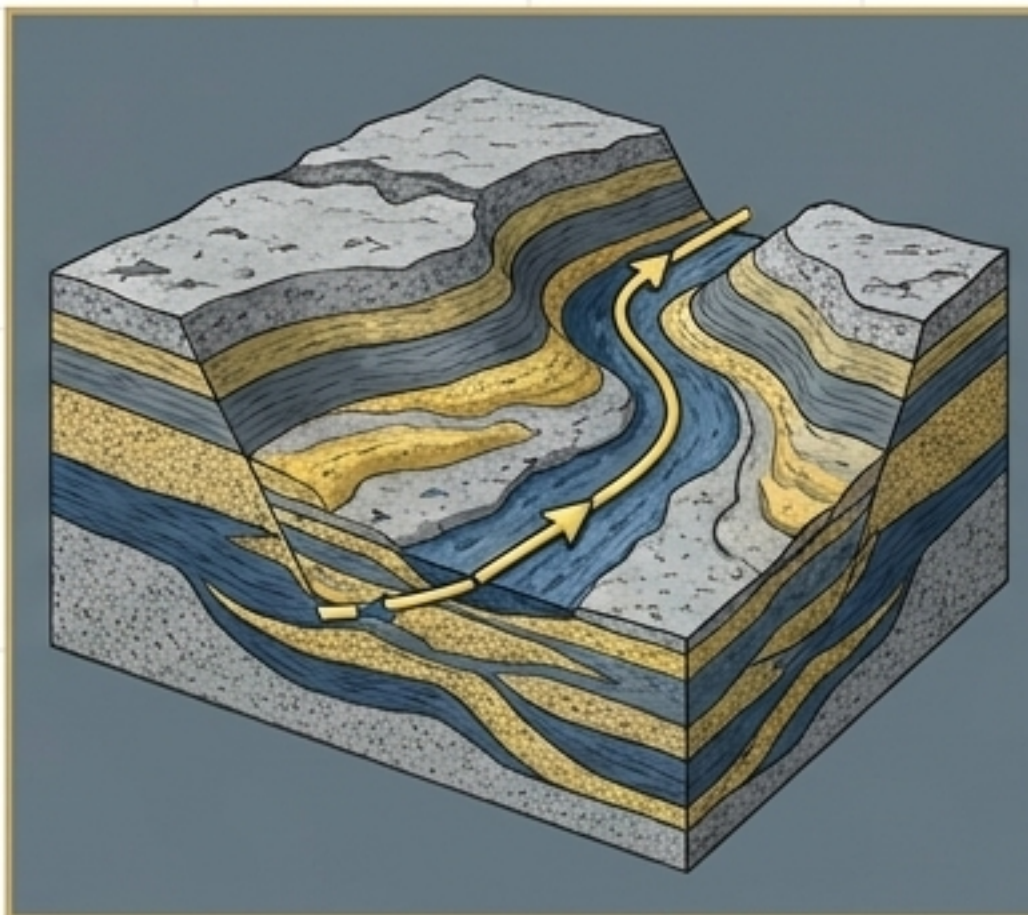

Geologist

Constructs static 3D geological models to analyze depositional environments, selecting precise coordinates and geosteering windows.

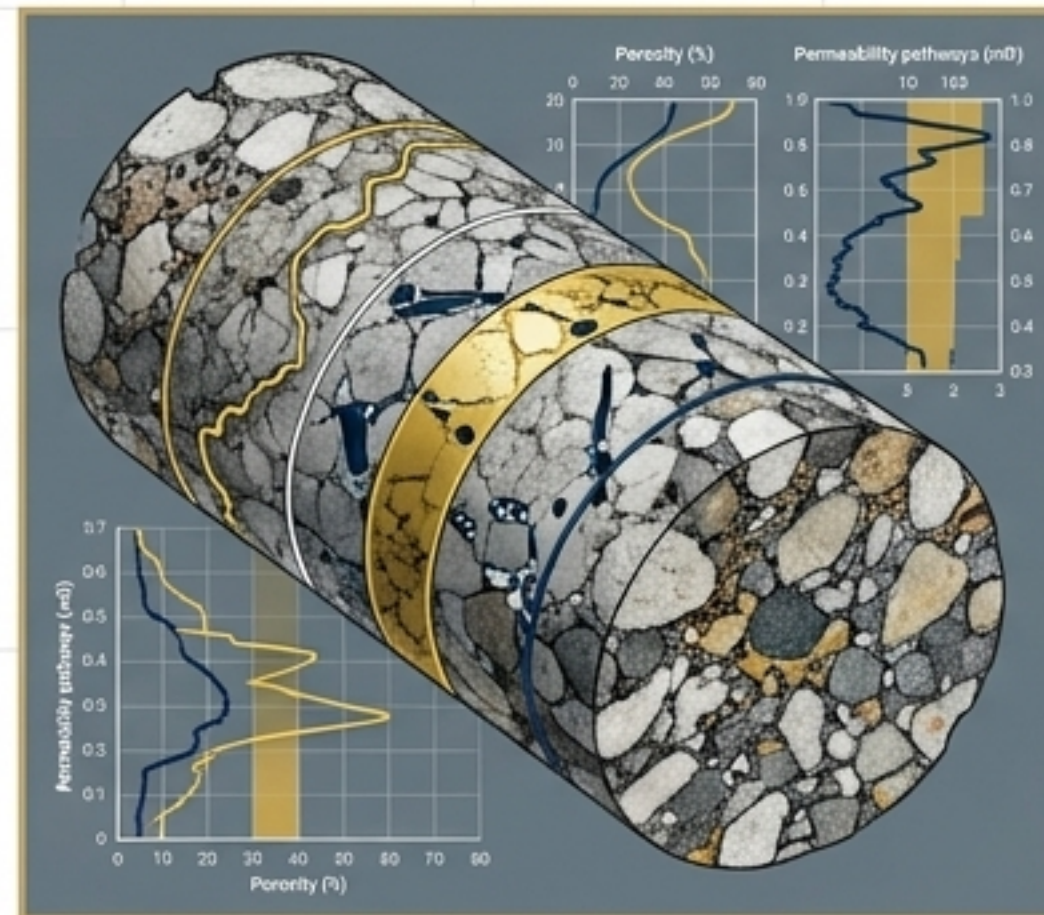


Petrophysicist

Analyzes historical wireline/LWD logs and core samples to calculate porosity, permeability, net-to-gross ratios, and water saturation (S_w) to identify the most prolific pay zones.


Designing the Asset and Justifying the Capital

Step 1: Reservoir Engineering

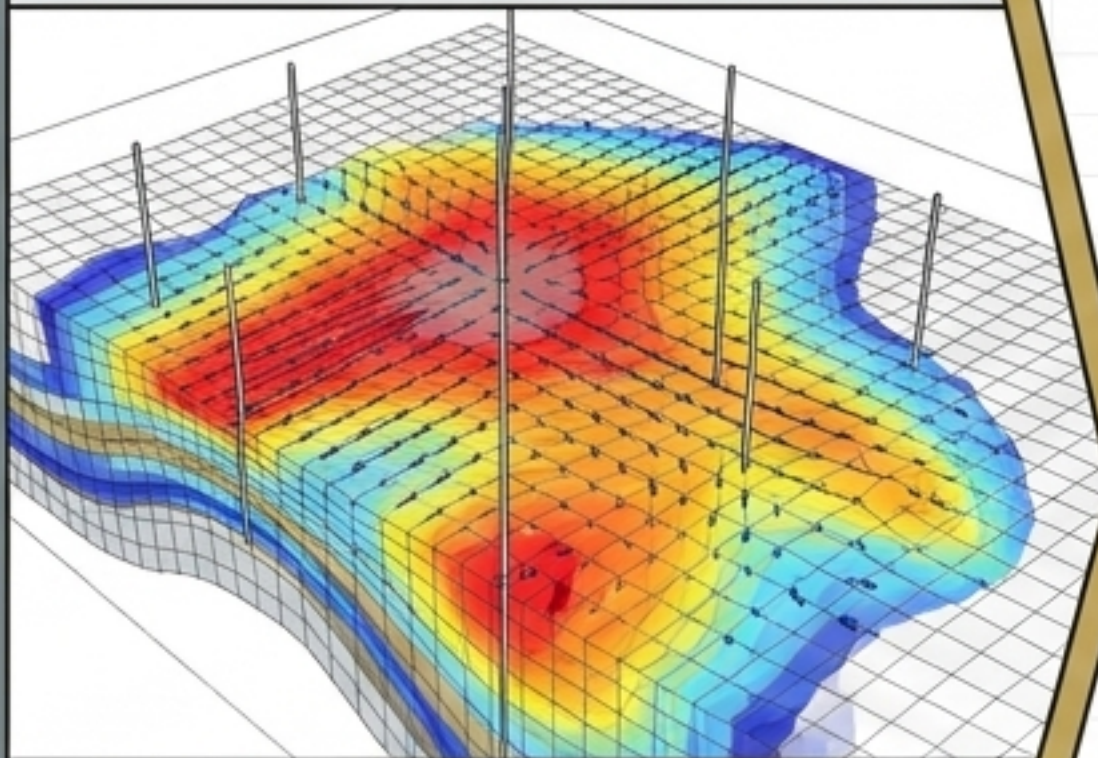


- Runs dynamic simulations to forecast production profiles and determine optimal well spacing.
- Calculates Estimated Ultimate Recovery (EUR) to provide the definitive economic justification (NPV/IRR) for YDP approval.

Step 2: Drilling Engineering

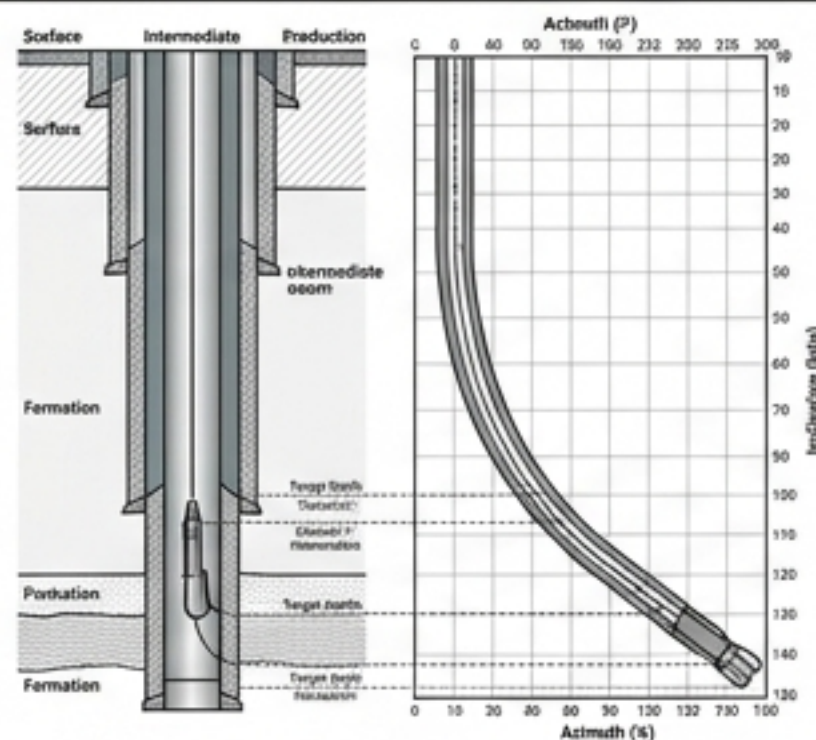

- Designs well trajectory, casing programs, and mud chemistry for wellbore stability.
- Compiles mechanical requirements into a rigid Authorization for Expenditure (AFE) cost estimate.

Step 3: Production Engineering

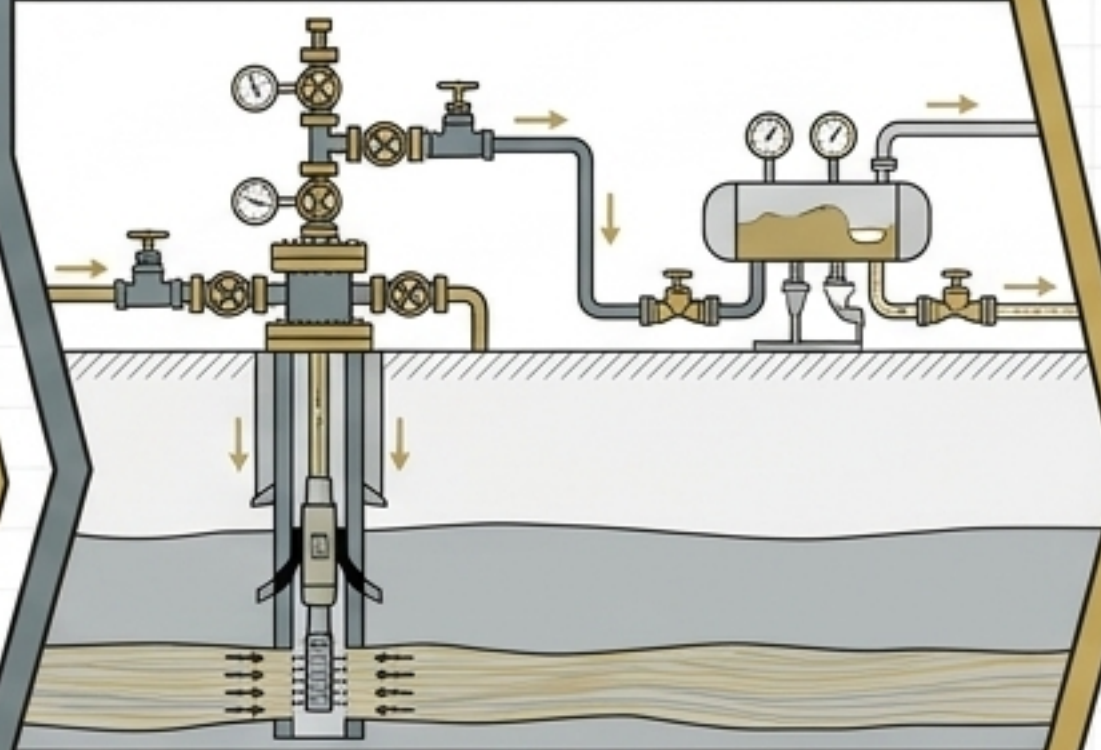

- Conducts Nodal Analysis to predict outflow performance.
- Designs completion strings and artificial lift systems (ESP or Gas Lift) to guarantee fluid delivery to surface facilities.


Increasing Asset Value (NPV/IRR)

Operational Agility from Planning to Real-Time Execution


Discipline	YDP Planning Phase	Active Drilling Phase
Geophysicist	Identify structural hazards	Adjust seismic-to-well ties
Geologist	Select target coordinates	Geosteer using real-time markers and mud logging
Petrophysicist	Analyze offset logs for pay zones	Interpret LWD and wireline logs for definitive casing placement
Reservoir Eng.	Forecast EUR and calculate NPV	Analyze transient well tests (DSTs) to update dynamic models
Drilling Eng.	Design wellbore and formulate AFE	Optimize ROP and troubleshoot (e.g., lost circulation, stuck pipe)
Prod. Eng.	Design completion & artificial lift	Supervise stimulation, clean-up, and flowback

Robust Cost Estimation and Capital Allocation

Converting advanced engineering design into reliable Authorization for Expenditure (AFE) models.

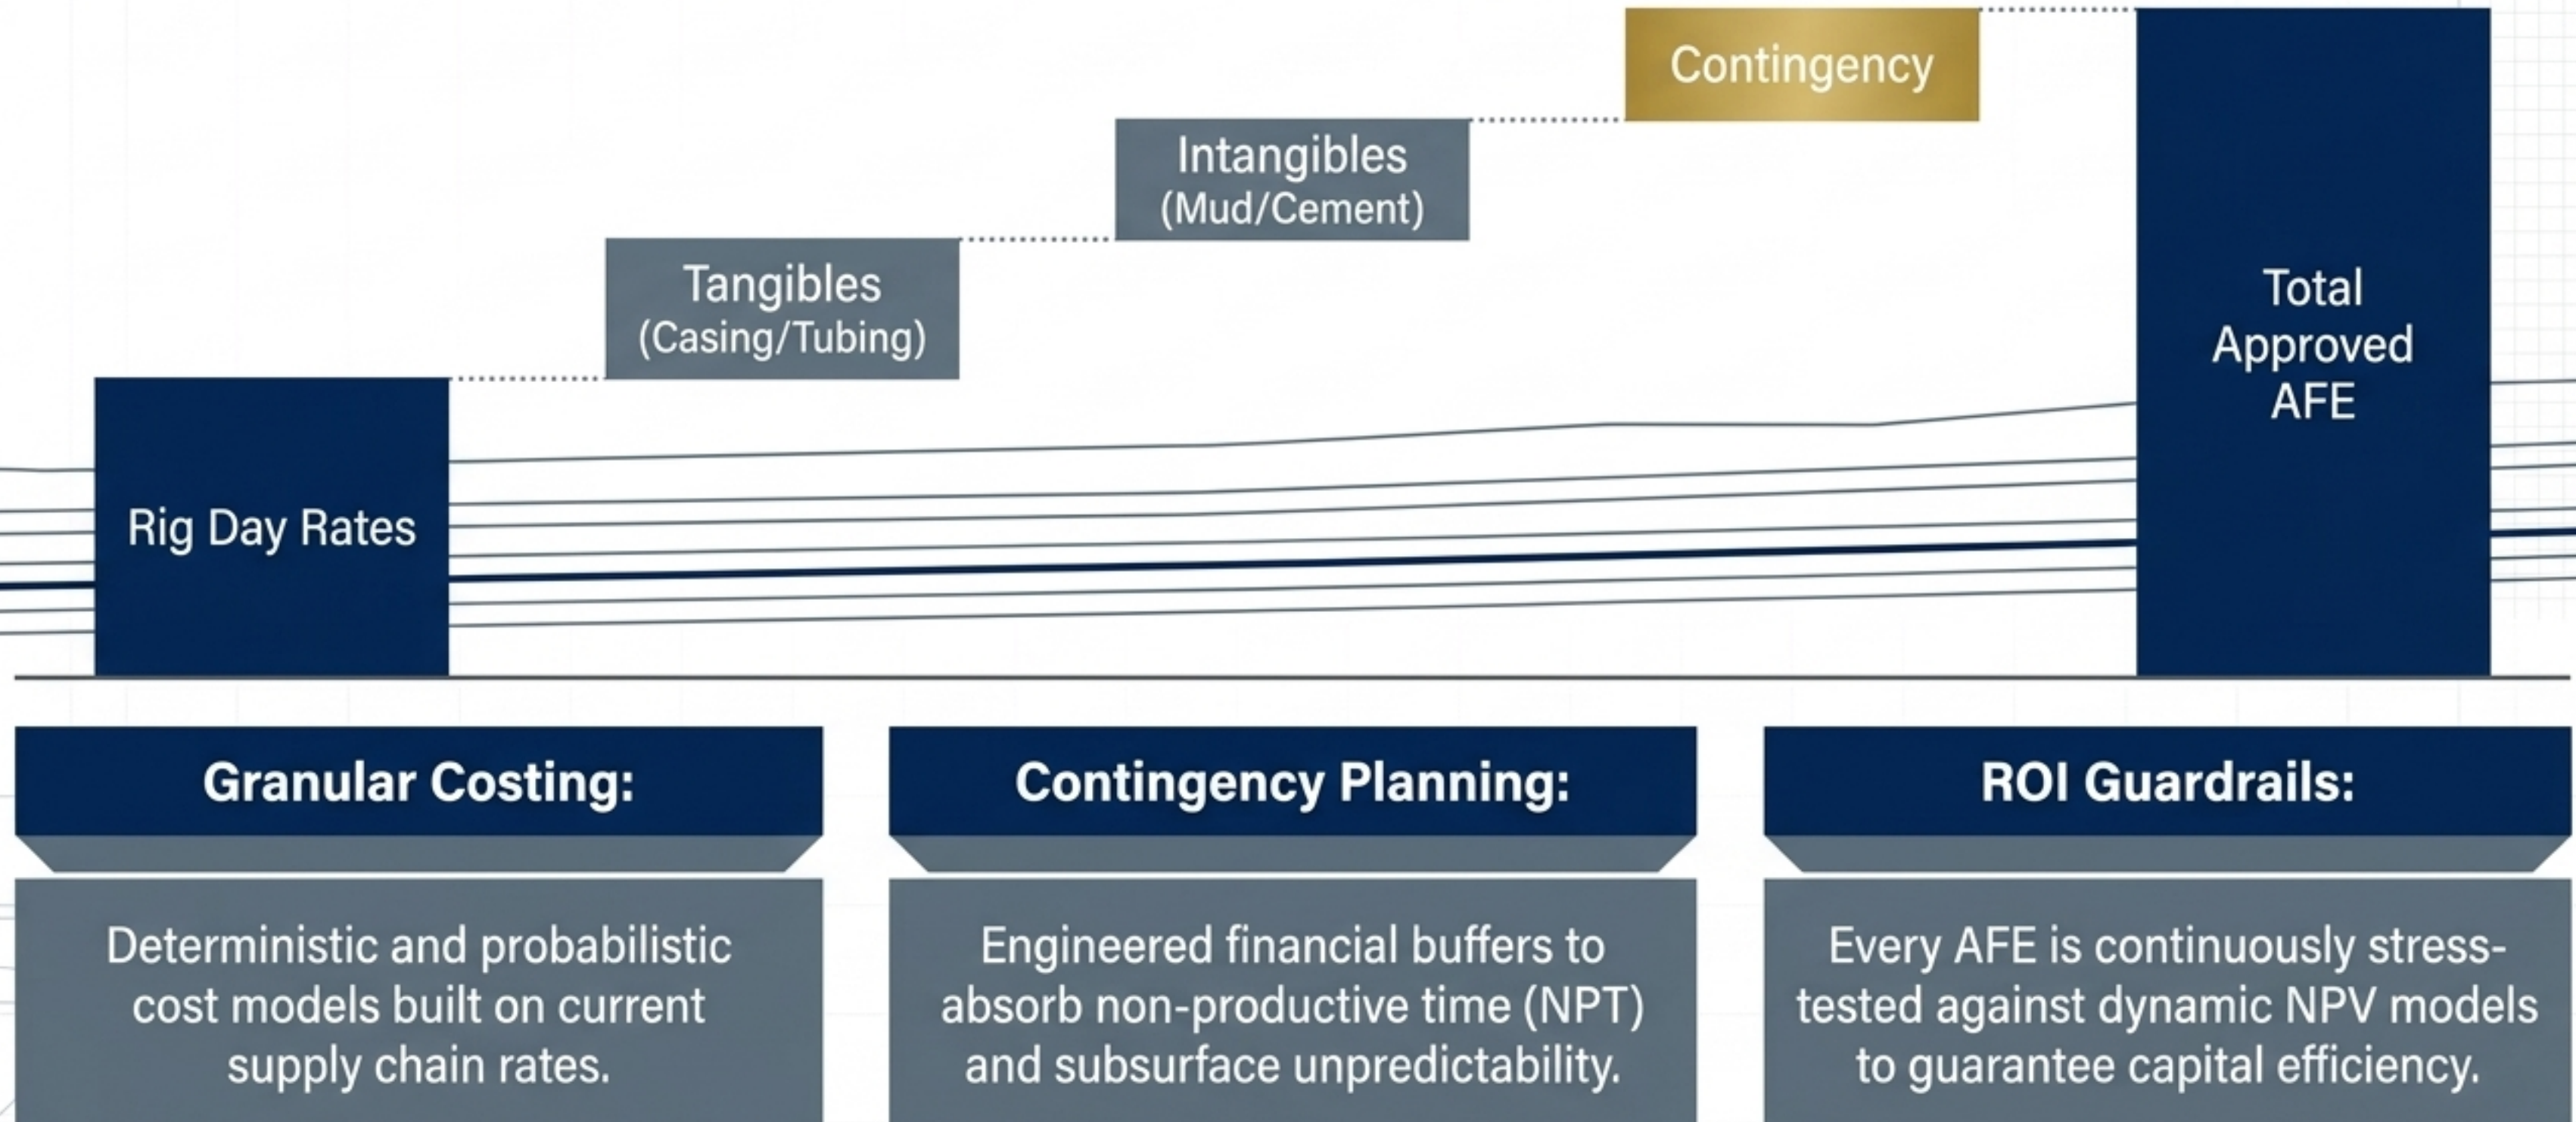

Synchronizing the Drilling Campaign

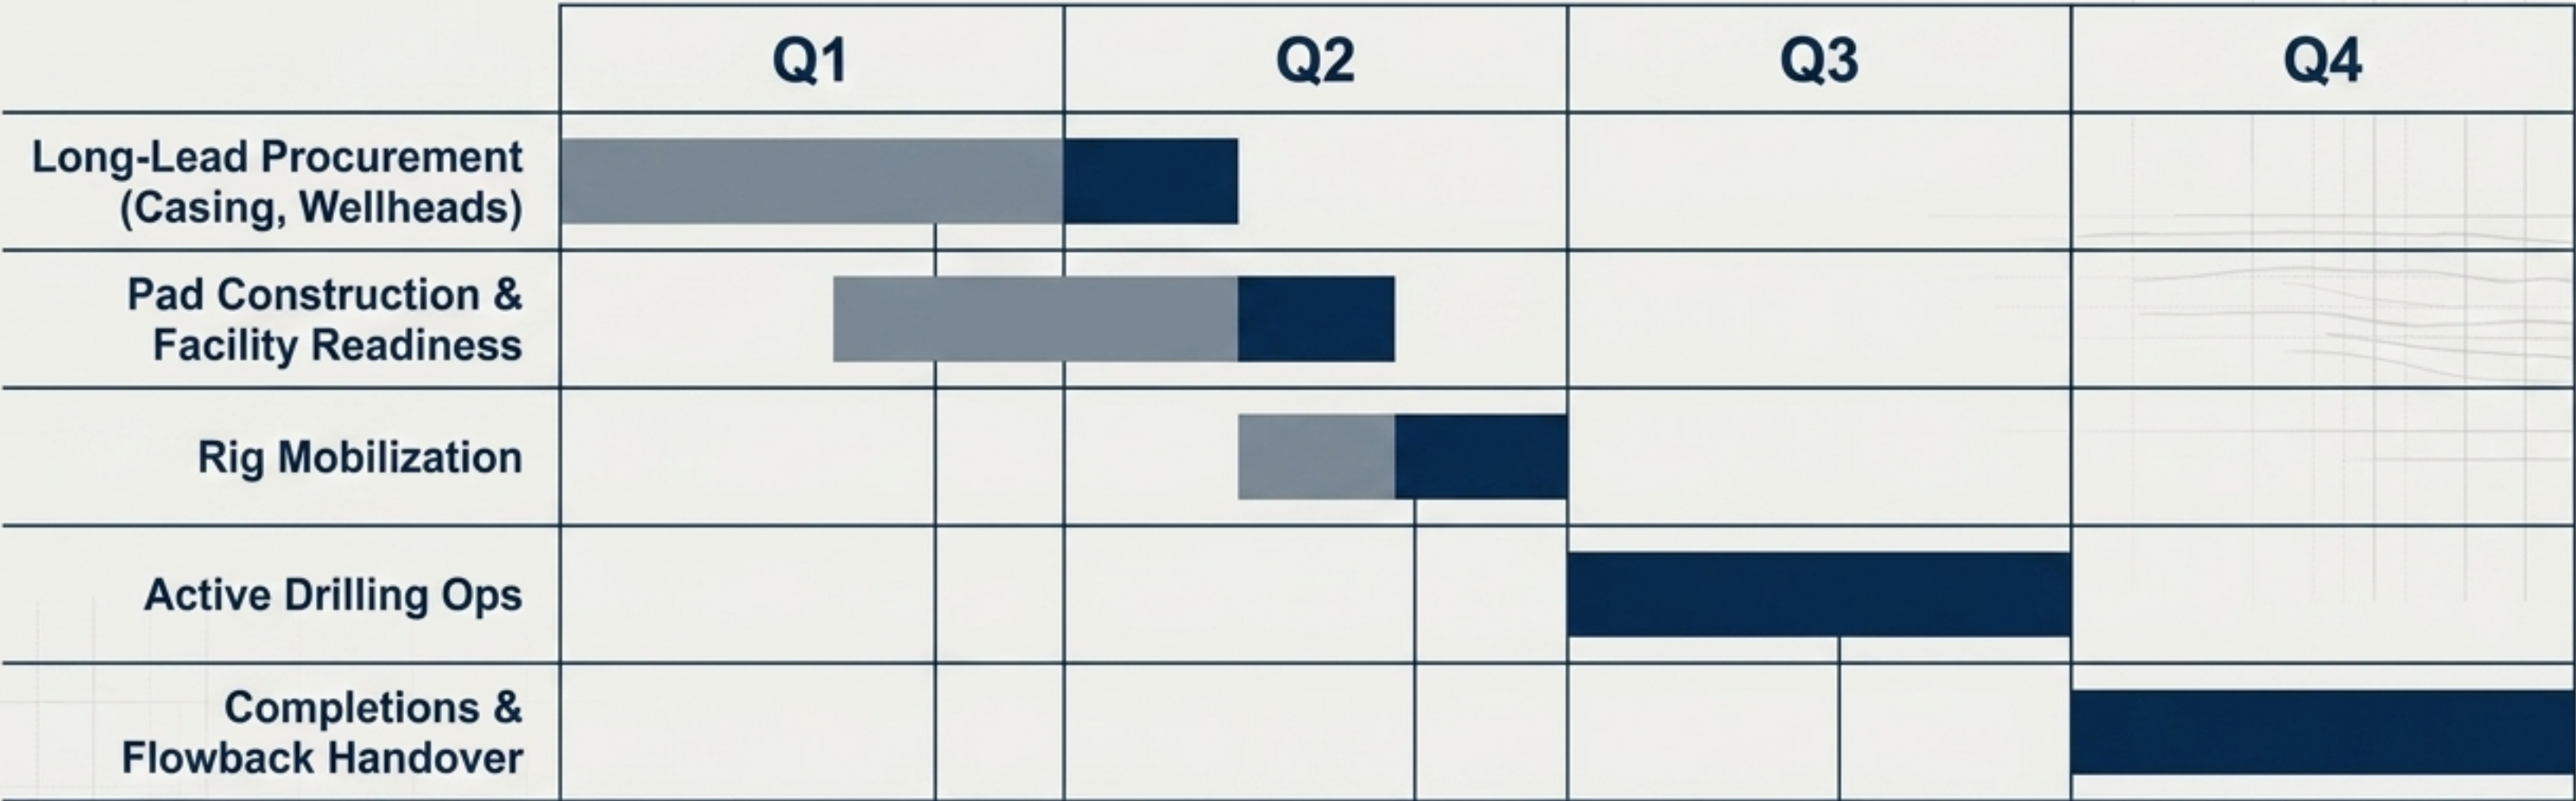


Proactive Procurement:
Securing artificial lift and specialized tubing early to prevent schedule drift.

Rig Sequencing:
Optimizing rig movement to minimize mobilization costs and footprint.

Facility Readiness: Aligning surface infrastructure to receive flow the moment production engineering hands over the well.

Integrated Risk Management Strategy

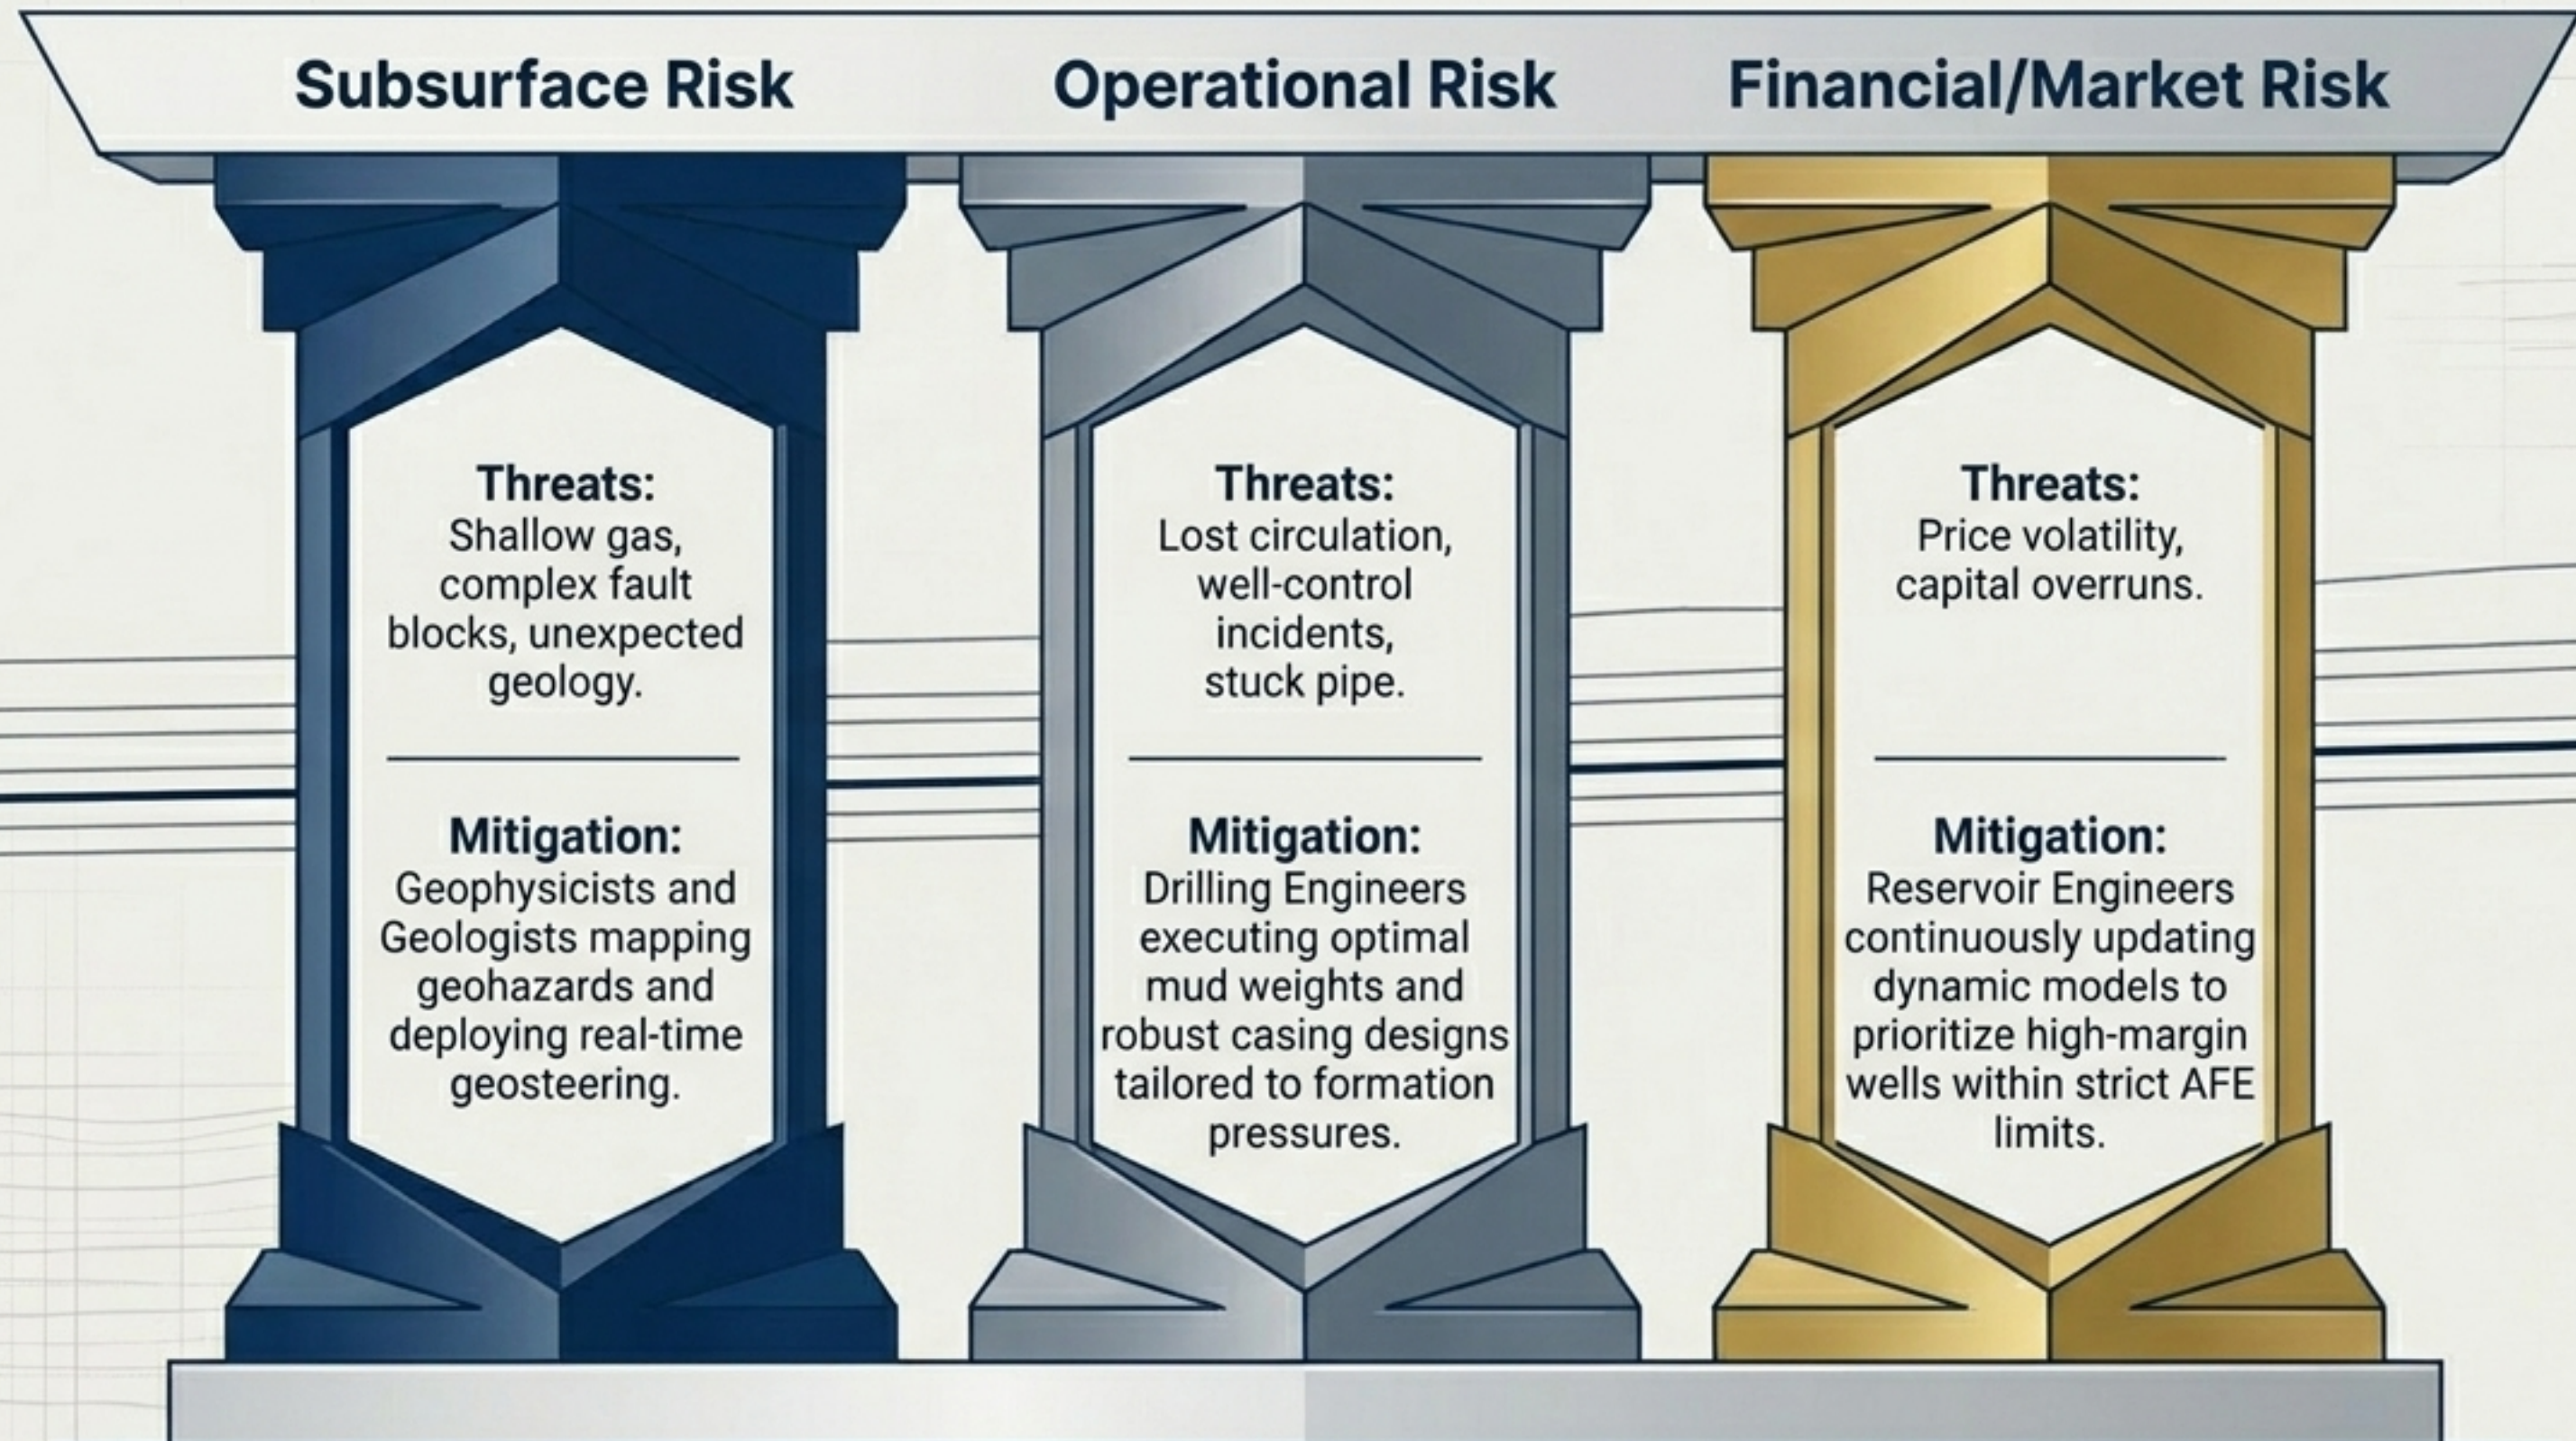

Engineered for Execution

The Yearly Drilling Plan perfectly aligns subsurface reality with corporate strategy. Through intense multidisciplinary collaboration, proactive risk mitigation, and granular financial modeling, we have transformed raw geological concepts into a high-confidence, high-ROI operational roadmap.

Executive Mandate & Next Steps

1. Board approval of preliminary AFE estimates.
2. Initiate Q1 long-lead supply chain procurement.
3. Commence continuous rig deployment and drilling operations.